

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 742 993 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
05.04.2000 Bulletin 2000/14

(51) Int Cl.7: **H04N 7/50, H04N 7/62,
H04Q 11/04**

(21) Application number: **95936725.1**

(86) International application number:
PCT/IB95/01075

(22) Date of filing: **29.11.1995**

(87) International publication number:
WO 96/17491 (06.06.1996 Gazette 1996/26)

(54) VIDEO EDITING BUFFER MANAGEMENT

VIDEOSCHNITTPUFFERVERWALTUNG

GESTION DE TAMPON DE MONTAGE VIDEO

(84) Designated Contracting States:
DE FR GB

(30) Priority: **02.12.1994 GB 9424436**

(43) Date of publication of application:
20.11.1996 Bulletin 1996/47

(73) Proprietor: **Koninklijke Philips Electronics N.V.
5621 BA Eindhoven (NL)**

(72) Inventor: **BLANCHARD, Simon
Horley, Surrey RH6 8HP (GB)**

(74) Representative: **White, Andrew Gordon et al
Philips Electronics UK Limited,
Patents and Trade Marks Department,
Cross Oak Lane
Redhill, Surrey RH1 5HA (GB)**

(56) References cited:
**EP-A- 0 655 867 DE-A- 4 343 450
US-A- 5 241 383 US-A- 5 283 646**

- **PATENT ABSTRACTS OF JAPAN, Vol. 13, No. 390, E-813; & JP,A,1 136 468 (FUJITSU LTD), 29 May 1989.**
- **PROCEEDINGS OF THE SPIE, Volume 2501, 1995, (USA), LIN-L-J et al., "Gradient-Based Buffer Control Technique for MPEG", page 1502 - page 1513.**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 0 742 993 B1

Description

[0001] The present invention relates to the coding and editing of audio and video signals and in particular to producing segments of video material that can be joined together on the fly.

[0002] Typically when two video clips are played one after the other the decoder is reset to its start state before it decodes the second clip. This leads to the user seeing the last frame of the first clip frozen on the screen while the decoder re-initialises itself and starts decoding the next. Accompanying the re-initialisation there is usually a mute in the audio. This type of title behaviour is intrusive for the user, lessening their feeling of immersion within the title.

[0003] There is, accordingly, a need for seamless joining in which the transition between the end of one clip and the start of the next is not noticeable to the decoder. This implies that from the user's point of view there is no perceptible change in the viewed frame rate and the audio continues uninterrupted. Applications for seamless video are numerous, some examples from a CD-i perspective include video sequence backgrounds for sprites (computer generated images); an example use of this technique would be an animated character running in front of an MPEG coded video sequence. Another is a series of character-user interactions presented as short seamless clips where the outcome of the interaction will determine which clip appears next. A development of this is interactive motion pictures where the user (viewer) can influence the storyline. Branch points along the path a user chooses to take through the interactive movie should appear seamless, otherwise the user will lose the suspension of disbelief normally associated with watching a movie.

[0004] It is therefore an object of the present invention to enable coding of video frame sequences in a way which allows them to be joined without causing perceptible disturbances.

[0005] In accordance with the present invention there is provided a method for encoding of digital video signals in encoder apparatus having a coding stage and an encoder buffer, the digital video signals being in the form of segments each comprising two or more pictures, the method comprising the steps of: successively encoding the pictures of a segment according to a predetermined coding scheme; reading the encoded pictures into the buffer; and reading the encoded segment out of the buffer at a substantially constant bit rate; characterised in that a predetermined buffer occupancy is specified and in that a target number of bits used to encode a picture is controllably varied such as to produce an encoder buffer occupancy substantially equal to the said predetermined buffer occupancy at the moment the last picture of the segment has been read into the buffer.

[0006] By targeting a buffer occupancy for all segments, irrespective of their length, the occupancy at the beginning of any segment will be substantially the same

such that joining of segments will be a relatively simple task.

[0007] Rather than modifying the last picture of a segment, a respective target number of bits may be specified for each of the last K pictures of a segment, where K is an integer. This would allow changes to be introduced over a number of pictures to avoid visible distortion which might occur if a large change was required to be made to the last picture of the segment alone.

[0008] Suitably, the coding stage is operable to encode a picture according to the MPEG standard and at a number of quantisation levels, with the quantisation level used being chosen in dependence on the target level set. If required, for example, if such quantisation levels are limited, the coding stage may add one or more zero-value bits to an encoded picture to reach the target number, if the number of bits in the encoded picture is below the target.

[0009] Also in accordance with the present invention there is provided a digital video signal encoder apparatus configured for the encoding of image segments, where each segment comprises two or more pictures, the apparatus comprising: an encoding stage arranged to receive successive pictures of a segment and encode them according to a predetermined coding scheme; and a buffer coupled to receive successive encoded pictures from the encoding stage and arranged to output an encoded segment at a substantially constant bit rate; characterised in that the encoding stage is operable to encode pictures in a controllably variable number of bits, the apparatus further comprising target setting means arranged to monitor the encoder stage output and control the number of bits per picture of the encoder stage on the basis thereof such as to produce a predetermined buffer occupancy at the moment the last picture of a segment is read into the buffer.

[0010] The target setting means may suitably be arranged to control the number of bits per picture for the last K pictures of a segment as described above, and the encoding stage may suitably be configured to add zero-value bits to an encoded picture to make up the number specified by the target setting means.

[0011] Further in accordance with the present invention there is provided a digital video image segment encoded by the above described method, and an optical disc carrying a plurality of such encoded segments, as defined in the attached claims to which reference should now be made.

[0012] Preferred embodiments will now be described by way of example only, and with reference to the accompanying drawings in which:

Figure 1 shows an idealised model of the MPEG encoder/decoder relationship;

Figure 2 represents encoder and decoder buffer contents for a sequence of pictures;

Figure 3 represents encoder and decoder buffer contents at the joining of two sequences; and

Figure 4 is a block diagram of an encoder apparatus embodying the present invention.

[0013] The following description considers video coders operating according to the MPEG standards (ISO 11172-2 for MPEG1 and ISO 13818-2 for MPEG2) although the skilled practitioner will recognise the applicability of the present invention to other video coding schemes not in conformance with the MPEG standard.

[0014] Any coding standard must be developed with models of how the encoder and decoder interface to one another. As an encoder runs it has to model what will happen in the decoder so that it never sends the decoder into an illegal (overflow or underflow) state. Similarly, the decoder must support the same model that the encoder used such that it remains in a legal state and produces the output the coder intended. MPEG is no exception to this rule. The model of the decoder in MPEG is called the Video Buffering Verifier (VBV).

[0015] Figure 1 shows an idealised model of the MPEG encoder/decoder relationship. Assuming the system is operating in real-time and that the channel delay is negligible, the following sequence of events occurs:

1. Digitised frames are fed into the encoder at a constant frame rate F.
2. The encoder codes these frames introducing a variable delay of t_e seconds.
3. The coded frames are transferred to the decoder at a constant bit rate R.
4. The decoder decodes the frames introducing a variable delay of t_d seconds.
5. The decoded frames are displayed at the same constant frame rate F.

[0016] Now in order for the above system to work it will be understood that the delay introduced in the encode-decode cycle must be constant to enable maintenance of a constant frame rate at the output of the decoder. This is summarised in equation 1 as:

$$t_e + t_d = T \quad (1)$$

Where T is a constant.

[0017] Figure 2 shows graphs of buffer occupancy B against time t showing how the encoder and decoder buffers are related. The discussion that follows will concentrate on the picture indicated by the bold line containing P bits. The data rate of the system is a constant R bits per second. Note that P is an arbitrary picture within the coded sequence and that when it is introduced the buffer is not assumed to be empty, rather the buffer contains a number of bits that represent previous pictures placed in the buffer that have yet to be completely flushed.

[0018] Dealing first with the encoder buffer, the model used in software encoders is that the encoder introduces pictures instantaneously into its output buffer and the buffer is flushed at a constant R bits per second. Considering the picture P, the encoder introduces the picture P into the buffer taking its occupancy up to B_e bits, the buffer is emptied at R bits per second, and, after a certain time, t_e , all the bits in P are removed from the buffer. The time that this occurs at is t_e in Figure 2. Accordingly, the encoder buffer delay for picture P can be worked out from the buffer occupancy and the emptying rate.

[0019] By the time t_e , all the bits that make up P have left the encoder's buffer and entered into the decoder's buffer. There is a delay t_d between all the bits entering the decoder's buffer and the picture being removed. If B_d is the decoder buffer occupancy after P has been removed then the decoder buffer delay can also be calculated from the buffer occupancy and the emptying rate.

[0020] Bringing these delay values into equation (1) we can write:

$$t_e + t_d = T = \frac{B_e}{R} + \frac{B_d}{R} \quad (2)$$

[0021] To find the value of T, it is assumed that t_d approaches zero. At this point, t_e must have its maximum value and be equal to T. By looking at Figure 2 we can see that the maximum value ($t_{e,max}$) is

$$t_{e,max} = T = \frac{B_{max}}{R} \quad (3)$$

Where B_{max} is the maximum buffer size used by the encoder.

[0022] By putting (2) and (3) together we get:

$$B_{max} = B_e + B_d \quad (4)$$

[0023] Equation (4) shows the relationship between the state of the encoders buffer at the instant after a picture has been introduced and the decoders buffer at the instant after the same picture has been removed. This is known as the complementary buffer relationship.

[0024] The MPEG standard (ISO 11172-2) at section 2.4.3.4 defines the VBV delay as the time needed to fill the VBV buffer from its initial empty state at the target bit rate R, to the correct level immediately before the current picture is removed from the buffer. With reference to Figure 2 it can be seen that the VBV delay can be thought of as the sum of two values τ and t_d . Knowing t_d and bearing in mind that τ is the time it takes to deliver the bits that make up P at the bit rate R, the VBV delay is given by:

$$\tau + t_d = \text{VBVdelay} = \frac{P + B_d}{R} \quad (5)$$

which corresponds to the ISO definition of the VBV delay. Considered another way, the VBV delay is the time it takes to deliver the bits that make up the picture added to the delay introduced in the buffer.

[0025] Figure 3 shows graphs of what happens to the encoder and decoder buffer states as one sequence of pictures A ends and another B starts. LA indicates the last picture of sequence A; FB indicates the first picture of sequence B. The change of delivery data from sequence A to sequence B is shown by a change in thickness of the buffer occupancy line with the chain-linked line indicating pictures from sequence A. At some time t_x all the data for sequence A has been delivered (i.e. cleared from the encoder buffer) and the decoder buffer has an occupancy of B_x bits. From this time on all the data delivered to the decoder buffer is for sequence B. Some pictures from the end of sequence A are still in the decoder buffer however, but all are removed by time t_1 when the buffer has an occupancy of B_1 bits.

[0026] The term targeting is used herein to refer to the process the encoder goes through when it is trying to achieve a certain occupancy in the VBV buffer. During targeting the encoder assumes that the VBV buffer has a certain target occupancy when the first picture it has coded is put into the buffer. This places an upper limit on the size of the first picture. At the end of a coding run the encoder targets the VBV occupancy at the time just before the first picture for the next sequence would be removed from the buffer, point B_1 in Figure 3. The encoder targets this state by changing the size of the last, or last few pictures, as it codes them.

[0027] The process the encoder goes through when producing a coded piece of video with targeted VBV states will now be described. In the example shown in Figure 3 the encoder has been set to target the state B_1 for the decoder buffer. This state represents the VBV buffer occupancy at the time just before the first picture of the new sequence is removed. Assuming that the previous sequence was operating at the same bit rate and frame rate, the buffer occupancy at the time just after removal of the last picture of the previous sequence is given as:

$$B_1 = B_t - RT \quad (6)$$

where: B_1 and B_t are as shown in Figure 3, R is the bit rate, and T is the frame period.

[0028] Using equation (4) we can derive the corresponding states in the encoders output buffer for B_1 and B_t :

$$B_{tc} = B_{\max} - B_t \quad (7)$$

$$B_{1c} = B_{\max} - B_1 \quad (8)$$

[0029] Due to the constant bit rate R , the delays associated with these states are:

$$t_{tc} = \frac{B_{tc}}{R} \quad (9)$$

$$t_{1c} = \frac{B_{1c}}{R} \quad (10)$$

[0030] When an encoder runs it is usually separate from the decoder and manages picture sizes based on its output buffer state rather than transforming to and from the VBV buffer state. Accordingly, the following discussion refers to buffer levels B_{1c} and B_{tc} (Figure 3).

[0031] When targeting a start state, the encoder assumes a certain occupancy in its buffer at the point when it introduces the first picture. This buffer occupancy is B_{1c} bits, as derived in equation (7), which represents the residual bits from the end of the previous sequence. The presence of these bits limits the maximum size of the first picture to be B_1 bits and continues to have an effect on the limits of future picture sizes until all the bits have been removed, after time t_{1c} .

[0032] From the encoder's point of view, start state targeting is very simple since all that is required is for it to set its initial occupancy to B_{1c} bits rather than the conventional start state of being empty.

[0033] When the encoder approaches the end of a segment, it tries to target the point B_{tc} . In other words, the encoder forces the size of the last picture to be such that when it puts it into the buffer the occupancy will increase to B_{tc} bits. To arrive at the correct picture size may be achieved by an iterative process:

1. The coder has a first go at coding the picture.
2. If the picture is too big it re-codes with increased quantisation.
3. If the picture is too small it can stuff with zero bytes.

[0034] As will be understood, it would produce a poor quality picture if a large amount of size fixing were required and all occurred on the last picture. To avoid this the encoder can have a target number of bits for the last GOP (Group of Pictures) within the segment, and a target number of bits for each of the K pictures within the GOP. This allows the encoder to gradually approach the desired buffer state.

[0035] The buffer occupancy target has to be large

enough so that, for the pictures that make up the target, the picture quantisation is not so large as to have a detrimental effect on picture quality. The target also has to be large enough so that it is actually possible for the coder to make pictures that fit into the buffer without producing buffer underflow.

[0036] The size of the decoder buffer target is proportional to the time it takes to reach that target, since in the model we are operating at a constant bit rate. For some interactive applications the fill time is significant because this is the delay between starting play of a clip and pictures appearing on the screen. From the point of view of speed of reaction to user interaction the smaller the target the better. Experiments have shown that targeting a VBV occupancy of around 75% of maximum fullness gives good results. That translates to about 245760 bits for a typical sequence according to the constrained system parameters stream (a subset of the MPEG standard covering CD applications). In practice, however, it is possible to target at a lower level, typically 204000 bits.

[0037] A schematic representation of the encoder is shown in Figure 4. A received video signal (at constant frame rate F) is passed to coding stage 10 for encoding according to the MPEG standard. The frame count FC of the incoming video signal is also input to a target setting stage 12. The target setting stage determines the level of quantisation (or amount of zero-bit stuffing) to be applied to the current picture by the coding stage 10 to achieve the buffer occupancy B_c at the end of the segment. The coded signal in the form of GOPs having controlled bit allocation is read to an encoder buffer 16 and output to a transmission channel at the data transmission rate R. A feedback path 14 from the encoder output to the target setting stage 12 enables confirmation that target levels are being attained.

Claims

1. A method for encoding of digital video signals in encoder apparatus having a coding stage (10) and an encoder buffer (16), the digital video signals being in the form of segments each comprising two or more pictures, the method comprising the steps of:

- successively encoding (10) the pictures of a segment according to a predetermined coding scheme;
- reading the encoded pictures into the buffer; and
- reading the encoded segment out of the buffer at a substantially constant bit rate;

characterised in that a predetermined buffer occupancy is specified and in that a target number of bits

used to encode a picture is controllably varied such as to produce an encoder buffer occupancy substantially equal to the said predetermined buffer occupancy at the moment the last picture of the segment has been read into the buffer.

2. A method as claimed in claim 1, wherein a respective target number of bits is specified for each of the last K pictures of a segment, where K is an integer.
3. A method as claimed in claim 1, wherein the coding stage is operable to encode a picture at a number of quantisation levels, and the quantisation level used is chosen in dependence on the target level set.
4. A method as claimed in Claim 1, in which the coding stage adds one or more zero-value bits to an encoded picture to reach the target number, if the number of bits in the encoded picture is below the target.
5. A method as claimed in Claim 1, in which the pictures of a segment are encoded according to the MPEG standard.
6. A digital video signal encoder apparatus (10, 12, 16), configured for the encoding of image segments, where each segment comprises two or more pictures, the apparatus comprising:

an encoding stage (10) arranged to receive successive pictures of a segment and encode them according to a predetermined coding scheme; and

a buffer (16) coupled to receive successive encoded pictures from the encoding stage and arranged to output an encoded segment at a substantially constant bit rate;

characterised in that the encoding stage (10) is operable to encode pictures in a controllably variable number of bits, the apparatus further comprising target setting means (12) arranged to monitor the encoder stage output and control the number of bits per picture of the encoder stage on the basis thereof such as to produce a predetermined buffer occupancy at the moment the last picture of a segment is read into the buffer.

7. Apparatus (10, 12, 16) as claimed in Claim 6, wherein the target setting means (12) is arranged to control the number of bits per picture for each of the last K pictures of a segment, where K is an integer.
8. Apparatus (10, 12, 16) as claimed in Claim 6,

wherein the encoding stage(10) is configured to add zero-value bits to an encoded picture to make up the number specified by the target setting means where the predetermined coding scheme requires fewer bits than specified by the target setting means for coding that picture.

9. A digital video image segment encoded by the method of Claim 1, the segment comprising a sequence of pictures encoded according to a predetermined coding scheme, wherein each of the last K pictures of the segment (where K is an integer) are encoded in respective numbers of bits such that, when the encoded segment is read at substantially constant bit rate into a decoder buffer from which successive pictures are removed for decoding at real time display rate, a predetermined buffer occupancy occurs at the moment the data for the last picture of the segment has been read into the buffer.

10. An optical disc carrying a plurality of encoded video image segments according to Claim 9, wherein all segments provide the same predetermined buffer occupancy following reading of the respective last pictures.

Patentansprüche

1. Verfahren zum Codieren von digitalen Videosignalen in einer Codiervorrichtung mit einer Codierstufe (10) und einem Codierpuffer (16), wobei die digitalen Videosignale in Form von Segmenten vorliegen, die jeweils zwei oder mehr Bilder enthalten, und wobei das Verfahren die folgenden Schritte umfasst:

- aufeinanderfolgende Codierung (10) der Bilder eines Segmentes gemäß einem vorher festgelegten Codierschema;
- Einlesen der codierten Bilder in den Puffer; und
- Auslesen des codierten Segments aus dem Puffer mit einer im wesentlichen konstanten Bitrate;

dadurch gekennzeichnet, dass eine vorgegebene Pufferbelegung spezifiziert ist und dass eine Zielanzahl von Bits für die Codierung eines Bildes steuerbar variiert werden kann, um eine Codierpufferbelegung zu schaffen, die im wesentlichen der genannten vorgegebenen Pufferbelegung zu dem Zeitpunkt entspricht, an dem das letzte Bild des Segmentes in den Puffer eingelesen wurde.

2. Verfahren nach Anspruch 1, wobei eine bestimmte Zielanzahl von Bits für jedes der letzten K Bilder eines Segmentes spezifiziert wird, wobei K eine Ganzzahl ist.

3. Verfahren nach Anspruch 1, wobei die Codierstufe zum Codieren eines Bildes mit einer Anzahl von Quantisierungsebenen dient und die benutzte Quantisierungsebene in Abhängigkeit des eingestellten Zielpiegels gewählt wird.

4. Verfahren nach Anspruch 1, wobei die Codierstufe ein oder mehrere Bits vom Wert Null zu einem codierten Bild hinzufügt, um die Zielanzahl zu erreichen, wenn die Anzahl der Bits in dem codierten Bild unterhalb der Zielvorgabe liegt.

5. Verfahren nach Anspruch 1, wobei die Bilder eines Segmentes gemäß der MPEG-Norm codiert werden.

6. Codiervorrichtung für digitale Videosignale (10, 12, 16) zum Codieren von Bildsegmenten, wobei jedes Segment zwei oder mehr Bilder enthält und wobei die Vorrichtung folgendes umfasst:

eine Codierstufe (10), die so ausgelegt ist, dass sie aufeinanderfolgende Bilder eines Segmentes empfängt und sie gemäß einem vorher festgelegten Codierschema codiert; und einen Puffer (16), der so angeschlossen ist, dass er aufeinanderfolgende codierte Bilder von der Codierstufe empfängt, und so ausgelegt ist, dass er ein codiertes Segment mit einer im wesentlichen konstanten Bitrate ausgibt;

dadurch gekennzeichnet, dass die Codierstufe (10) so funktioniert, dass sie Bilder in einer steuerbar variablen Anzahl von Bits codiert, wobei die Vorrichtung außerdem Mittel zur Zielwertvorgabe (12) umfasst, die vorgesehen sind, um die Ausgabe der Codierstufe zu überwachen und davon ausgehend die Anzahl Bits pro Bild der Codierstufe zu steuern, so dass zu dem Zeitpunkt, an dem das letzte Bild eines Segmentes in den Puffer gelesen wird, eine vorher festgelegte Pufferbelegung erzeugt wird.

7. Vorrichtung (10, 12, 16) nach Anspruch 6, wobei die Mittel zur Zielwertvorgabe (12) so ausgelegt sind, dass sie die Anzahl der Bits pro Bild für die letzten K Bilder eines Segmentes steuern, wobei K eine Ganzzahl ist.

8. Vorrichtung (10, 12, 16) nach Anspruch 6, wobei die Codierstufe (10) so konfiguriert ist, dass sie Bits mit dem Wert Null zu einem codierten Bild hinzufügt und dadurch die durch die Zielvorgabemittel festgelegte Anzahl von Bits bildet, wobei das vorgegebene Codierschema weniger Bits erfordert als durch die Zielvorgabemittel zum Codieren dieses Bildes spezifiziert werden.

9. Digitales Videobild-Segment, das durch das Ver-

fahren nach Anspruch 1, codiert wird, wobei das Segment eine Folge von Bildern enthält, die nach einem vorgegebenen Codierschema codiert sind, wobei jedes der letzten K Bilder des Segmentes (wobei K eine Ganzzahl ist) in entsprechenden Anzahl von Bits codiert werden, so dass, wenn das codierte Segment mit einer im wesentlichen konstanten Bitrate in einen Decodierpuffer gelesen wird, aus dem aufeinanderfolgende Bilder zum Decodieren mit Echtzeit-Anzeigerate entfernt werden, eine vorgegebene Pufferbelegung zu dem Zeitpunkt auftritt, an dem die Daten für das letzte Bild des Segmentes in den Puffer eingelesen worden sind.

10. Optische Platte mit einer Vielzahl von codierten Videobildsegmenten nach Anspruch 9, wobei alle Segmente zu der gleichen vorgegebenen Pufferbelegung nach dem Lesen der betreffenden letzten Bilder führen.

Revendications

1. Procédé de codage de signaux vidéo numériques dans un appareil de codage comprenant un étage de codage (10) et une mémoire tampon de codeur (16), les signaux vidéo numériques se présentant sous la forme de segments contenant chacun deux images ou davantage, le procédé comprenant les étapes ayant pour fonction de :

- coder successivement (10) les images d'un segment conformément à un schéma de codage prédéterminé ;
- introduire les images codées dans la mémoire tampon, et
- extraire le segment codé de la mémoire tampon à un débit binaire sensiblement constant ;

caractérisé en ce qu'une occupation prédéterminée de la mémoire tampon est spécifiée et en ce qu'un nombre cible de bits utilisés pour coder une image est modifié d'une manière pouvant être contrôlée afin de produire une occupation de la mémoire tampon du codeur sensiblement égale à ladite occupation prédéterminée de la mémoire tampon au moment où la dernière image du segment a été introduite dans la mémoire tampon.

2. Procédé suivant la revendication 1, dans lequel un nombre cible de bits respectif est spécifié pour chacun des dernières K images d'un segment, K étant un nombre entier.
3. Procédé suivant la revendication 1, dans lequel l'étage de codage peut fonctionner pour coder une image à un certain nombre de niveaux de quantification, et le niveau de quantification utilisé est sé-

lectionné en fonction du niveau de ciblé réglé.

4. Procédé suivant la revendication 1, dans lequel l'étage de codage ajoute un ou plusieurs bits de valeur zéro à une image codée pour atteindre le nombre cible si le nombre de bits dans l'image codée est inférieur au nombre cible.

5. Procédé suivant la revendication 1, dans lequel les images d'un segment sont codées conformément à la norme MPEG.

6. Appareil codeur de signaux vidéo numériques (10, 12, 16), configuré pour le codage de segments comprenant chacun deux images ou davantage, l'appareil comportant :

un étage de codage (10) prévu pour recevoir des images successives d'un segment et les coder conformément à un schéma de codage prédéterminé, et
une mémoire tampon couplée pour recevoir des images codées successives de l'étage de codage et agencée pour produire un segment codé à un débit binaire sensiblement constant ;

caractérisé en ce que l'étage de codage (10) peut fonctionner pour coder des images en un nombre de bits variable d'une manière pouvant être contrôlée, l'appareil comprenant, en outre, des moyens de réglage de cible (12) prévus pour surveiller la sortie de l'étage de codage et contrôler le nombre de bits par image de l'étage de codage sur la base de celle-ci de manière à produire une occupation prédéterminée de la mémoire tampon au moment où la dernière image d'un segment est introduite dans la mémoire tampon.

7. Appareil (10, 12, 16) suivant la revendication 6, dans lequel les moyens de réglage de cible (12) sont prévus pour contrôler le nombre de bits par image pour chacune des dernières K images d'un segment, K étant un nombre entier.

8. Appareil (10, 12, 16) suivant la revendication 6, dans lequel l'étage de codage (10) est configuré de façon à ajouter des bits de valeur zéro à une image codée pour atteindre le nombre spécifié par les moyens de réglage de cible lorsque le schéma de codage prédéterminé requiert moins de bits que le nombre spécifié par les moyens de réglage de cible pour le codage de cette image.

9. Segment d'image vidéo numérique codé par le procédé suivant la revendication 1, le segment comprenant une séquence d'images codées conformément à un schéma de codage prédéterminé, dans lequel chacun des dernières K images du segment

(K étant un nombre entier) est codé en des nombres de bits respectifs de telle sorte que, lorsque le segment codé est introduit à un débit binaire sensiblement constant dans une mémoire tampon de décodeur de laquelle des images successives sont supprimées pour le décodage à une fréquence d'affichage en temps réel, une occupation prédéterminée de la mémoire tampon se produit au moment où les données de la dernière image du segment sont introduites dans la mémoire tampon.

5

10

10. Disque optique contenant une pluralité de segments vidéo codés suivant la revendication 9, dans lequel tous les segments fournissent la même occupation prédéterminée de la mémoire tampon après la lecture de leurs dernières images respectives.

15

20

25

30

35

40

45

50

55

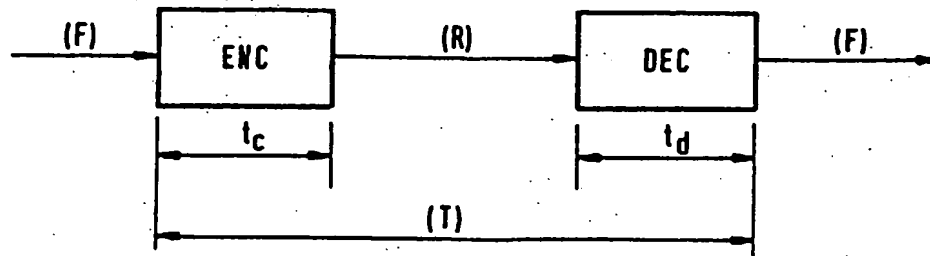


FIG.1

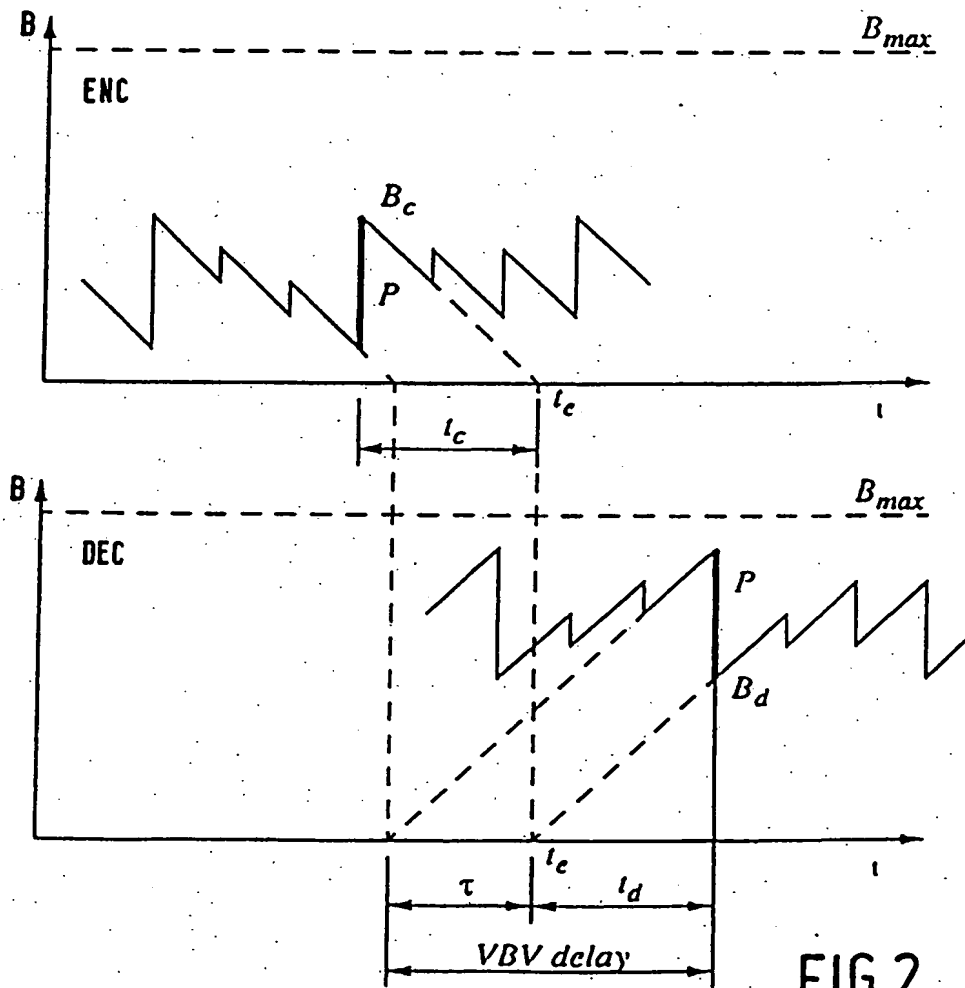


FIG.2

